Stainless Steel Bleed Rings

1" to 24" nominal sizes · Class 150, 300 & 600 flanges · Threaded bleed port

OVERVIEW

Trilogy stainless steel bleed rings install between two flanges to add a connection point at the flange joint. The radial port lets operators bleed, drain or vent the line, and provides a place to mount gauges and other instruments without modifying the pipe or valve.

Rings are machined from solid stainless steel and sized to standard flange dimensions from 1" through 24" in Class 150, 300 and 600.

> **What to include in your request:** nominal size, flange class, bleed port size and quantity, and service conditions (fluid, pressure and temperature).



Stainless steel bleed rings

RING DIMENSIONS KEY

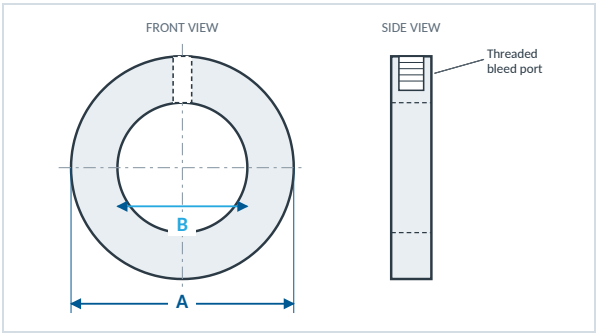


Illustration for reference only. Not to scale.

SPECIFICATIONS AT A GLANCE

Material	Stainless steel
Nominal Sizes	1" through 24"
Flange Classes	150, 300 and 600
Bleed Port	Threaded, radial
Dimension B	Ring inside diameter
Dimension A	Ring OD, by flange class

DIMENSION CHART (INCHES)

SIZE		B	"A" DIMENSION		
Inches	Part No. Prefix		Class 150	Class 300	Class 600
1	0100	1 5/16	2 1/2	2 3/4	2 3/4
1 1/2	0150	1 7/8	3 1/4	3 5/8	3 5/8
2	0200	2 3/8	4	4 1/4	4 1/4
3	0300	3 1/2	5 1/4	5 3/4	5 3/4
4	0400	4 1/2	6 3/4	7	7 1/2
6	0600	6 5/8	8 5/8	9 3/4	10 3/8
8	0800	8 5/8	10 7/8	12	12 1/2
10	1000	10 3/4	13 1/4	14 1/8	15 5/8
12	1200	12 3/4	16	16 1/2	17 3/4
14	1400	14	17 5/8	19	19 1/8
16	1600	16	20 1/8	21 1/8	22
18	1800	18	21 1/2	23 3/8	23 7/8
20	2000	20	23 3/4	25 5/8	26 5/8
24	2400	24	28 1/8	30 3/8	30 7/8